


2007


PARSUN

OUTBOARDS FOUR STROKE

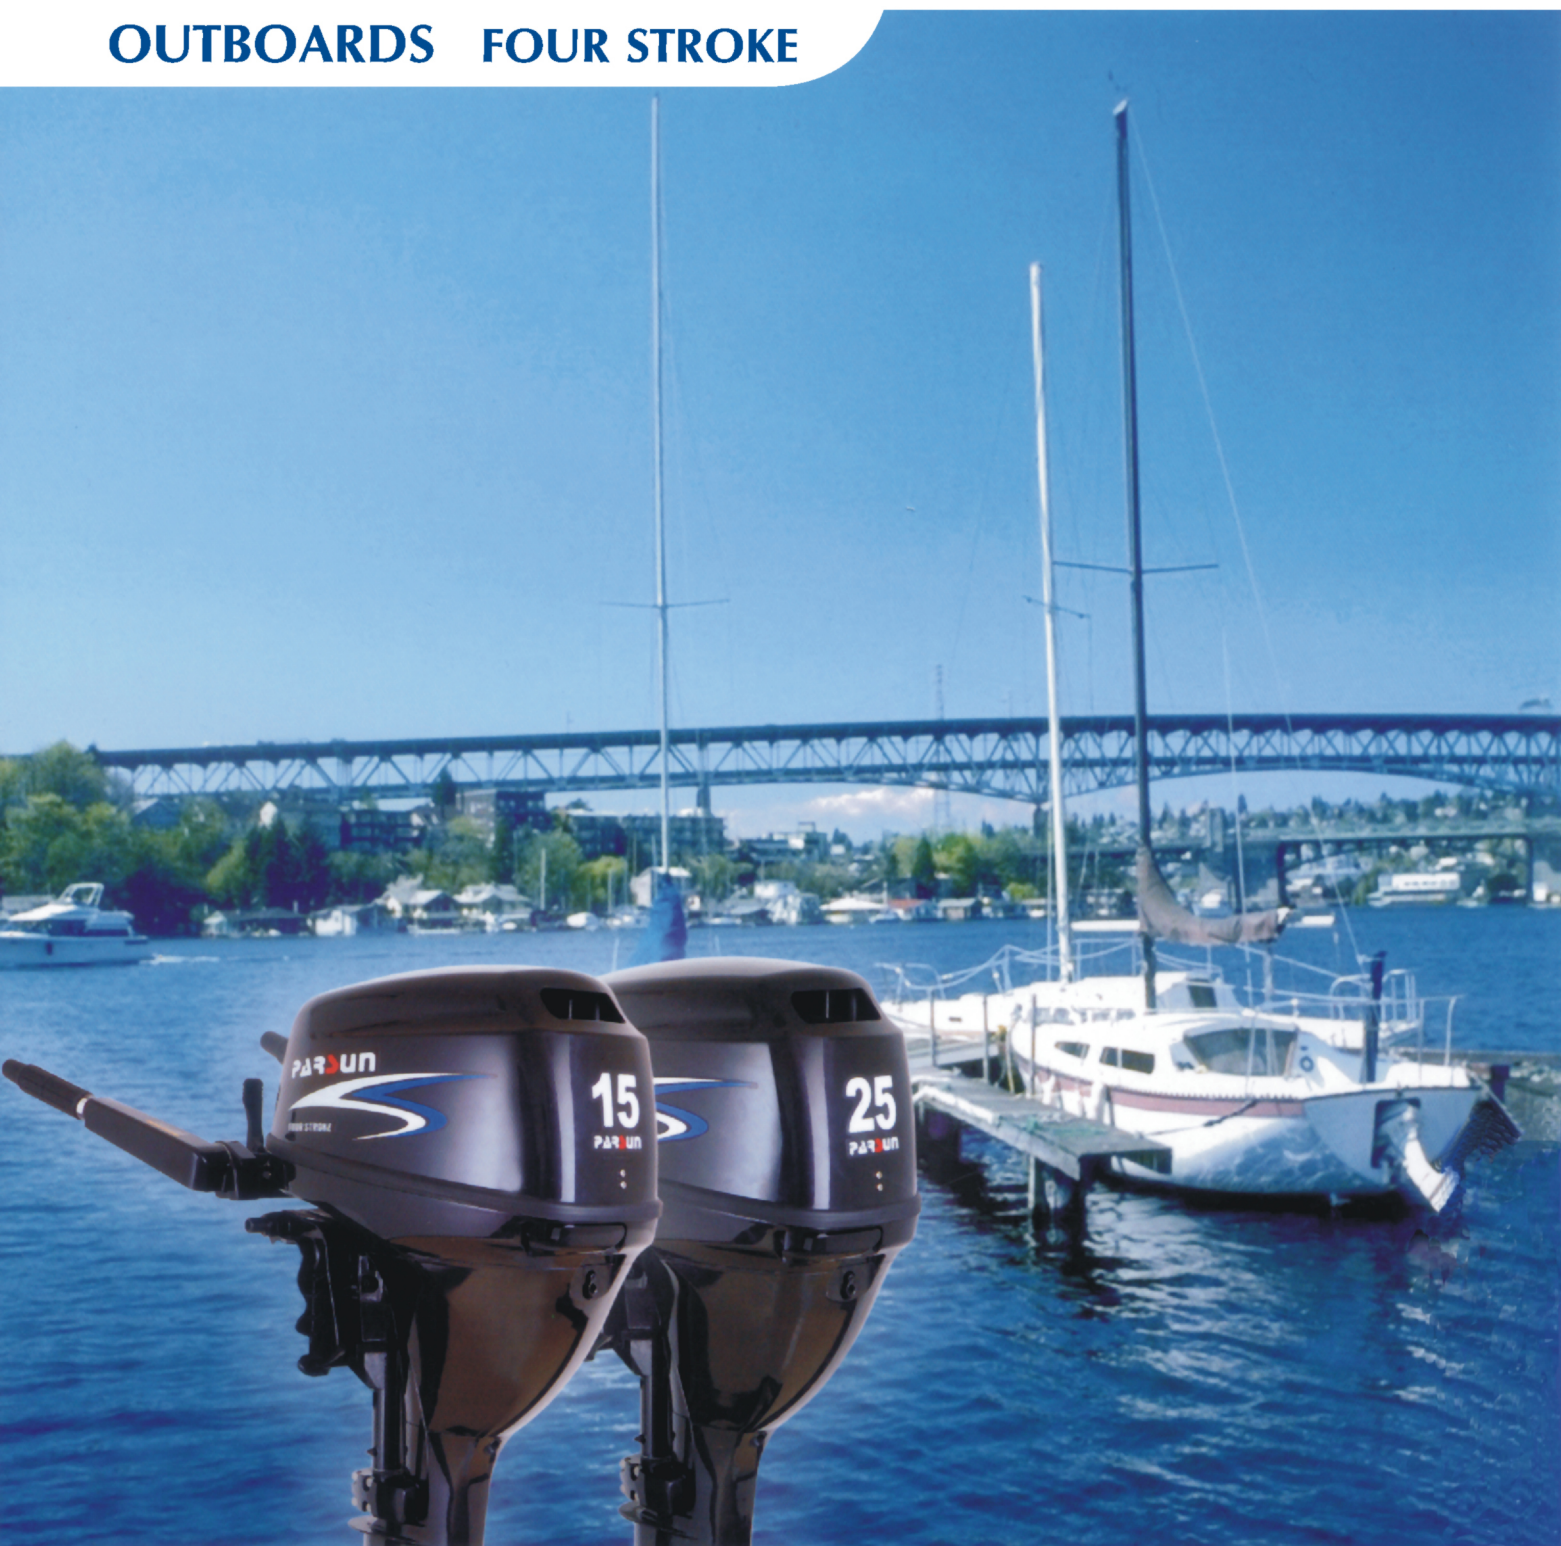

Suzhou Parsun Power Machine Co.,Ltd

EFFICIENT POWERFUL SILENT CLEAN

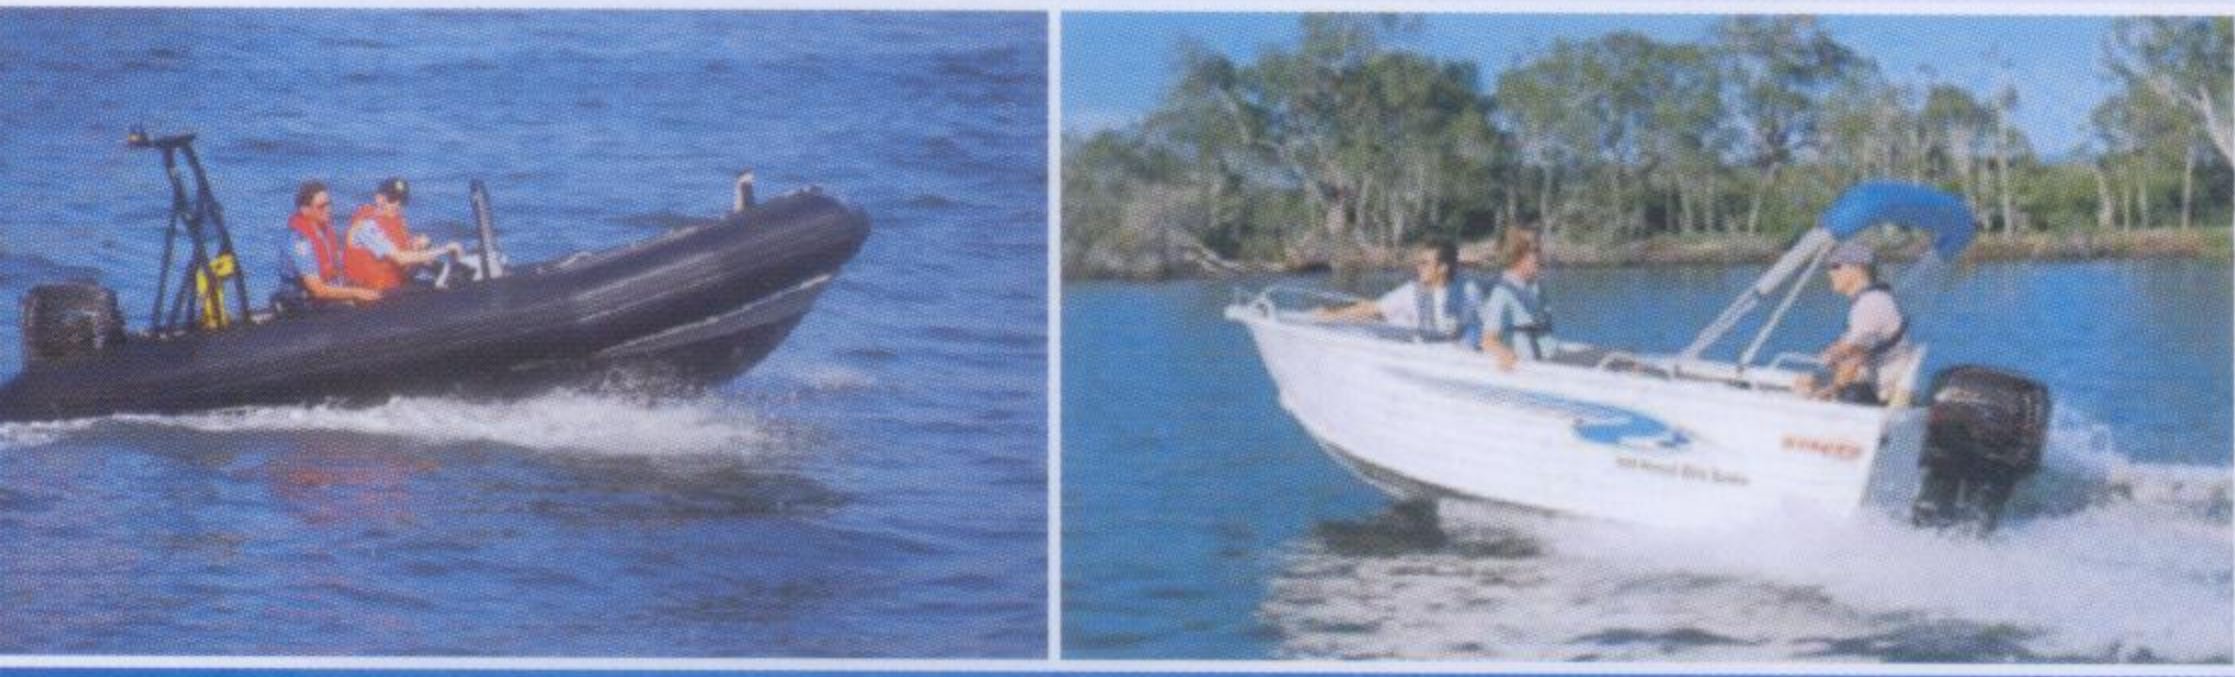

FOUR STROKE **OUTBOARDS**



PARSON F-25BML



PARSON F-20BML



PARSON F-15BMS

EFFICIENT POWERFUL SILENT CLEAN



PAR SUN F-15BML



PAR SUN F-9.9BMS



PAR SUN F-9.9BML

Item	Model	Unit	F25BML	F25FWL	F20BML	F20FWL	F15BMS	F15BML	F15FWS	F15FWL
Overall length		mm(in.)	1151 (45.3)	703 (27.7)	1151 (45.3)	703 (27.7)	1001 (39.4)	1001 (39.4)	643 (25.3)	643 (25.3)
Overall width		mm(in.)	430 (16.9)	376 (14.8)	430 (16.9)	376 (14.8)	427 (16.8)	427 (16.8)	369 (14.5)	369 (14.5)
Overall height		mm(in.)	1280 (50.4)				1080 (42.5)	1207 (47.5)	1080 (42.5)	1207 (47.5)
Transom height		mm(in.)	550 (21.7)				440 (17.3)	567 (22.3)	440 (17.3)	567 (22.3)
Weight		kg	68	70	68	70	49	51	51	53
Full throttle operating range		r/min	5000~6000				4500~5500			
Maximum output		kw(HP)@r/min	18.4(25)@5500		14.7(20)@5500		11(15)@5000			
Idling speed (Neutral)		r/min	925~1025				900~1000			
Engine type			OHC							
Cylinders			L2							
Displacement		cm ³	498				323			
Bore x stroke		mm(in.)	65x75(2.56x2.95)				59x59(2.32x2.32)			
Ignition system			CDI							
Control system			Tiller control	Remote Control	Tiller control	Remote Control	Tiller control		Remote Control	
Starting system			Manual start	Electric start	Manual start	Electric start	Manual start		Electric start	
Gear positions			Forward-Neutral-Reverse							
Gear ratio			2.08(27/13)							
Trim and tilt system			Manual tilt							
Fuel tank capacity		L	24							
Maximum fuel waste		L /h	9.2		7.3		5.3			
Engine oil capacity (Without oil filter)		L	1.7				1.0			
Gear oil capacity		cm ³	320				250			
Propeller options*		in	3-9 7/8" X11 1/4"				3-9 1/4" X10"			

*Propeller choice will vary by boat size and application.

EFFICIENT POWERFUL SILENT CLEAN



PARSON F-9.9FWS PARSON F-5BMS PARSON F-5BML PARSON F-4BMS PARSON F-4BML

Item	Model	Unit	F9.9BMS	F9.9BML	F9.9FWS	F9.9FWL	F5BMS	F5BML	F4BMS	F4BML
Overall length		mm(in.)	1001 (39.4)	1001 (39.4)	643 (25.3)	643 (25.3)	717 (28.2)	717 (28.2)	717 (28.2)	717 (28.2)
Overall width		mm(in.)	427 (16.8)	427 (16.8)	369 (14.5)	369 (14.5)	361 (14.2)	361 (14.2)	361 (14.2)	361 (14.2)
Overall height		mm(in.)	1080 (42.5)	1207 (47.5)	1080 (42.5)	1207 (47.5)	1029 (40.5)	1156 (45.5)	1029 (40.5)	1156 (45.5)
Transom height		mm(in.)	440 (17.3)	567 (22.3)	440 (17.3)	567 (22.3)	435 (17.1)	562 (22.1)	435 (17.1)	562 (22.1)
Weight		kg	49	51	51	53	24.5	25.5	24.5	25.5
Full throttle operating range		r/min	4500~5500				4000~5000			
Maximum output		kw(HP)@r/min	7.3(9.9)@5000				3.6(5)@5000		2.9(4)@4500	
Idling speed (Neutral)		r/min	900~1000				1450~1550			
Engine type			OHC				OHV			
Cylinders			L2				1			
Displacement		cm ³	323				112			
Bore x stroke		mm(in.)	59x59(2.32x2.32)				59x41(2.32x1.61)			
Ignition system			CDI				TCI			
Control system			Tiller control		Remote Control		Tiller control			
Starting system			Manual start		Electric start		Manual start			
Gear positions			Forward-Neutral-Reverse							
Gear ratio			2.08(27/13)							
Trim and tilt system			Manual tilt							
Fuel tank capacity		L	24				Integral 1.3			
Maximum fuel waste		L/h	3.5				2		1.6	
Engine oil capacity (Without oil filter)		L	1.0				0.5			
Gear oil capacity		cm ³	250				100			
Propeller options*		in	3-9 1/4" X10"				3-7 1/2" X8"			

*Propeller choice will vary by boat size and application.

PARSON

OUTBOARDS FOUR STROKE